


Origo™ Vac C10 Units

Origo™ Vac C10 Unit for light welding extraction applications.

- Easy to move and position
- Includes 3 metre (10ft.) long Origo™ Vac Arm
- Cleanable filter with high filtration efficiency and easy to replace
- Service hour meter
- Alarm for low air flow (time to clean or replace the cartridge)
- BGIA certified for welding fume category W3, according to EN ISO 15012-1.

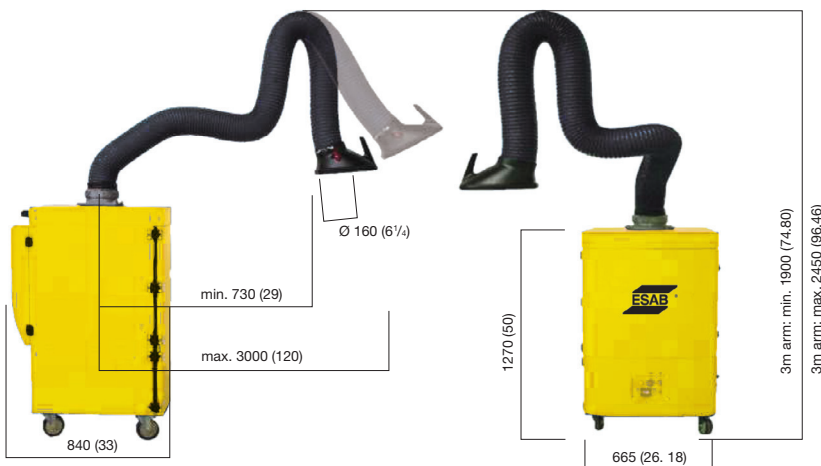

Arm length m (ft.)	Arm Ø, mm (in.)	Max. airflow ¹⁾ , m ³ /h (cfm)	Filter efficiency, %	Filter area, m ² (sq.ft)	Voltage, V/ electrical plug	Power, kW (Hp)	Frequency, Hz	Phase	Noise level dB (A)	Weight, kg (lbs)	Part no.
3 (10)	160 (6 1/4)	500-900 (300-530)	≥ 99	12 (125)	400/ EUR ³⁾	1.1 (1.5)	50	3	72	175 (385)	0700 003 038

1) Maximum 1100 m³/h (650 cfm) without extraction arm.

2) UK male plug delivered separately.

3) Without male plug.

Accessories	Part No.
Spark protection, for mounting in the hood. To reduce risk of fire.	0700 003 217

Replacement Filter	Part No.
12m ² spound bound polyester with PTFE lamination ≥ 99% efficiency for welding fume. Measured according to the test procedure in EN 15012-1.	0700 003 039